

### iWash®

#### Electronic Bidet Seat

S-10

#### Product Features

- Durable polypropylene body
- Self-cleaning, anti-microbial aluminum nozzle
- Rear and front wash spray
- Oscillating spray
- Adjustable water pressure and temperature
- Adjustable nozzle position
- One-touch wash-and-dry cycle
- Warm air dryer
- LED nightlight
- Two power-saving modes

#### Accessories Included


- Soft-close, sittable seat lid
- Metal T-valve
- Mounting plate and top-fixation seat bolt set
- Water supply hose
- Remote control, wall-mount and AA batteries (x2)

#### Quality Assurance

- Factory tested
- UL Listed
- 3-year limited product warranty




#### Dimensional Diagram

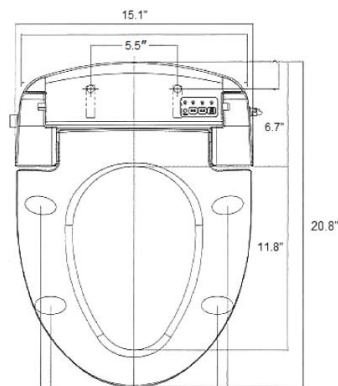

**NOTE:** iWash® S-10 may not fit certain bowl designs. Dimensions and specifications are subject to change without notice.

## PRODUCT OPTIONS & PARTS

Colors	
	
.01 White	

Valve & Installation Parts			
<b>Metal T-Valve</b>	Included in box	<b>Water Supply Hose</b>	Included in box
<b>Mounting Plate</b>	Included in box		
<b>Top-Fixation Seat Bolts</b>	Included in box		

Specifications					
<b>Power Supply:</b>	120V~, 60hz	<b>Water Features</b>			
<b>Max. Power Consumption:</b>	1460W	<b>Adjustable Water Flow Rate:</b>	Front wash: Max 0.185 gal/min (0.7 L/min)		
<b>Power Cord:</b>	3.94 ft. (1.2M)		Rear wash: Max 0.185 gal/min (0.7 L/min)		
<b>Water Supply Connection:</b>	Direct connection to water supply	<b>Adjustable Water Temp:</b>	Low: 93.2° F (34°C) Medium: 98.6° F (37° C) High: 104° F (40° C)		
<b>Water Supply Pressure:</b>	14.3psi – 106.6psi (98-735kPa)	<b>Heater Capacity:</b>	1400W	<b>Safety Device:</b>	Thermal Fuse, Thermostat
<b>Ambient Temp:</b>	37.4° F (3° C) - 95° F (35° C)	<b>Warm Air Dryer</b>			
<b>Warranty:</b>	3-year limited warranty	<b>Dryer Air Temperature:</b>	122° F (50° C)		
<b>Shipping Dimensions:</b>	23" x 18" x 9"	<b>Heater Capacity:</b>	195W	<b>Safety Device:</b>	Thermal Fuse, Bi-metal
<b>Shipping Weight:</b>	9.6 lbs	<b>Heated Seat</b>			
		<b>Adjustable Seat Temp:</b>	Low: 87.8° F (31° C) Medium: 95° F (35° C) High: 100.4° F (40° C)		
		<b>Heater Capacity:</b>	55W	<b>Safety Device:</b>	Thermostat

**WARNING:** It is critical that the power supply and water supply pressure conform to the specifications given above. Excessive supply may result in damage to the product, parts, and/or surrounding property. Do **not** install or use this product if the power or water supply are not within specifications.

Compliance Certifications	
Meets or exceeds the following specifications:	
<ul style="list-style-type: none"> <li>UL/cUL listed</li> </ul>	